



DISMANTLING JOINT

(2"-24")

HYMAX[®]
Repair the past. Connect the future.


INSTALLATION INSTRUCTIONS

DO NOT DISASSEMBLE THE DISMANTLING JOINT. DO NOT LUBRICATE THE BOLTS.

GENERAL INSTRUCTIONS:

THE DISMANTLING JOINT CONNECTS OR REPLACES VALVES, PUMPS, METERS AND PIPE ASSEMBLIES, QUICKLY AND EASILY, FOR REPLACEMENT OR MAINTENANCE PURPOSES.

STEP 1



Check the Krausz Dismantling Joint's parts to ensure no damage occurred during transit and that no parts are missing.


Make sure that the distance between the 2 flanges matches the minimum-maximum expansion capabilities of the Dismantling Joint, as indicated on the product label.

NOTE: Sizes 2"-12" have 1-bolt end ring. Sizes 14"-24" have 2-bolt end ring.

STEP 2


Ensure the mating flanges match the flange type of the Dismantling Joint.

STEP 3




Move the Dismantling Joint into position between the mating flanges. Remove the outer nuts of the tie-rods on both sides and insert the rods into holes in one flange.

STEP 4



Replace the outer nuts on the other side of the flange.


STEP 5



Insert the proper-sized flange gaskets (not provided) between the flange faces on both sides.


Using flange bolts, fasten the flanged coupling end of the dismantling joint to one of the mating flanges.

STEP 6



Expand the Dismantling Joint until both flanges are flush. Attach the Dismantling Joint to the opposite mating flange in your system and fasten together with flange bolts.

STEP 7




Tighten the INNER nuts against the flanges on both sides.

NOTE: Without the tie-rods in place, the product is NOT RESTRAINED.

Each tie rod will have a total of 4 nuts when assembled. Insert additional bolts and nuts through the remaining holes in the flanges to tighten the Dismantling Joint to both flanged products.

STEP 8




In sizes 2"-12": Tighten the bolt on the end ring.


In sizes 14"-24": the bolts evenly on each side of the end ring. Tighten the end ring bolts to the right torque as indicated on the label.

NOTE: Use of torque wrench is mandatory. The torque wrench will verify the proper torque has been achieved.

STEP 9



Recharge the line and check for leaks. If any leakage across the seal end is evident, reduce the pressure in the line and increase the labeled torque of the end ring bolts by up to 50%.

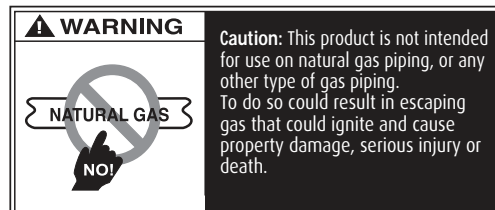

KRAUSZ USA. 331 SW 57TH AVENUE, OCALA, FLORIDA 34474 • INFO@KRAUSZUSA.COM

FOR ORDERING INFORMATION OR TO SPEAK WITH A KRAUSZ REPRESENTATIVE PLEASE CONTACT US AT:
855-457-2879 OR 855-4KRAUSZ. • FAX: 352-304-5787 • WWW. KRAUSZUSA.COM

KRAUSZ DISMANTLING JOINT is an original product of Krausz Industries.